

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 July 2004 (15.07.2004)

PCT

(10) International Publication Number  
**WO 2004/058599 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 85/06**,  
B60B 29/00, B65D 19/44

(21) International Application Number:  
PCT/BR2003/000203

(22) International Filing Date:  
23 December 2003 (23.12.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PI0205493-0 27 December 2002 (27.12.2002) BR

(71) Applicant (for all designated States except US): **MERITOR DO BRASIL LTDA.** [BR/BR]; Av. Major José Levy Sobrinho, 2700, 13486-925 Limeira SP (BR).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MARCÃO,**

Marcelino [BR/BR]; Rua Euclides Xavier de Lima, 350, 13484-317 Limeira SP (BR). **FRANCISCHETTI, Evan-dro, Luis** [BR/BR]; Rua Agenor Ferreira de Camargo, 100, Jardim São Roque, 13480-338 Limeira SP (BR).


(74) Agent: **DANNEMANN, SIEMSEN, BIGLER & IPANEMA MOREIRA**; Caixa Postal 2142, Rua Marquês de Olinda, 70, 22251-040 Rio de Janeiro RJ (BR).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: A TRAY, PARTICULARLY FOR TRANSPORTING VEHICLE WHEELS AND/OR WHEEL RIMS, AND A SUPPORT, PARTICULARLY FOR USE WITH A TRAY FOR TRANSPORTING VEHICLE WHEELS AND/OR RIMS OF VEHICLE WHEELS

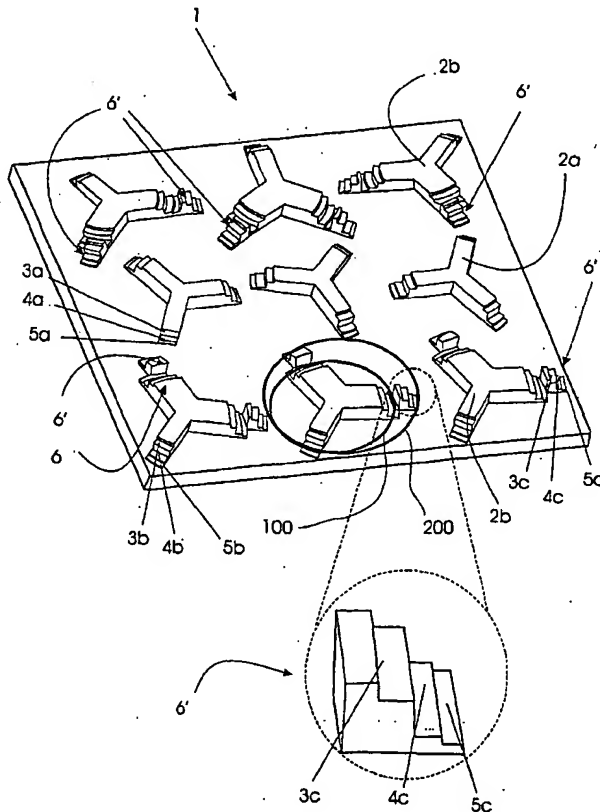

(57) Abstract: One describes a tray, particularly for transporting vehicle wheels and/or rims of vehicle wheels, comprising at least one support (2b) provided with at least one first frame (6) having at least one projection and defining at least one situation of interaction (100) with a first wheel configuration, the support (2b) being provided with at least one second frame (6'), the second frame (6') cooperating with the projection of the first frame (6), defining at least one second situation of interaction (200) with a second wheel configuration. One also describes a support (2b) for use with the tray (1) for transporting vehicle wheels/rims of vehicle wheels.

WO 2004/058599 A1